Model Name

Monitored PDU

Model Number

ATP-M-1511A-01-N1

15Amp 115V

General	
Output	(1) NEMA 5-15R
Input	(1) IEC320 C20 Inlet; Enclosed IEC320 C19 to NEMA 5-15P Power Cord 3 Meters long
Communication	
DHCP Indication	(1) Green LED
Network	(1) RJ45 for Ethernet
Circuit Status	(1) Red LED
Temp./Humidity	(1) RJ11 for ENV probe connection
Current Meter	3 Digits Meter Range: 0A ~ 20 A Resolution: 0.1A Precision: +/-2%+/ -0.1AMP
Operation	
Nominal Voltage	115V
Voltage	100V~127V full range
Frequency	50/60HZ full range
Max. Output Current	15 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	56 x 380 x 44 mm
Weight	1.5 kg
Regulatory Approvals	CE, EN 55032 Class A, EN 55024,EN 61000-3-2,EN 61000-3-3 FCC Part 15 Class A, ICES-003

Meter True RMS Current Meter,

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols TCPIP, SNMP, DHCP, UDP

Alarm Thresholds User-Defined Alarm Thresholds for Warning and Overload

Event Alert Email, Trap, Audible Alarm

Temp./Humidity Option Accessory

Copyright© 2019 Atlantic Power Energy - All rights reserved

Model Name

Monitored PDU

ATLANTIC POWER energy

Model Number

ATP-M-1511A-08-N1

15Amp 115V

Meter True RMS Current Meter,

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols TCPIP, SNMP, DHCP, UDP

Alarm Thresholds User-Defined Alarm Thresholds for Warning and Overload

Event Alert Email, Trap, Audible Alarm

General	
Output	(8) NEMA 5-15/20R
Input	(1) IEC320 C20 Inlet; Enclosed IEC320 C19 to NEMA 5 -15P Power Cord 3 Meters long
Protection	(1) 15 AMP Circuit Breaker
Communication	
DHCP Indication	(1) Green LED
Network	(1) RJ45 for Ethernet
Current Meter	3 Digits Meter Range: 0A ~ 20 A Resolution: 0.1A Precision: +/ -2%+/ -0.1AMP
Operation	
Nominal Voltage	115V
Voltage	100V~127V full range
Frequency	50/60HZ full range
Max. Output Current	15 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	90 x 432 x 44 mm
Weight	2 kg
Regulatory Approvals	CE, EN 55032 Class A, EN 55024,EN 61000 -3-2,EN 61000 -3-3 FCC Part 15 Class A, ICES -003

Model Name

Monitored PDU

ATLANTIC POWER energy

Model Number

ATP-M-1511A-12-N1

15Amp 115V

Meter True RMS Current Meter,

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols TCPIP, SNMP, DHCP, UDP

Alarm Thresholds User-Defined Alarm Thresholds for Warning and Overload

Event Alert Email, Trap, Audible Alarm

General	
Output	(12) NEMA 5 -15/20R
Input	(1) Attached IEC320 C19 to NEMA 5 -15P Power Cord 3 Meters long
Protection	(1) 15 AMP Circuit Breaker
Communication	
DHCP Indication	(1) Green LED
Network	(1) RJ45 for Ethernet
Current Meter	3 Digits Meter Range: 0A ~ 20 A Resolution: 0.1A Precision: +/ -5%+/ -0.1AMP
Operation	
Nominal Voltage	115V
Voltage	100V~127V full range
Frequency	50/60HZ full range
Max. Output Current	15 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	44 x 44 x 700 mm
Weight	2.5 kg
Regulatory Approvals	CE, EN 55032 Class A, EN 55024,EN 61000-3-2,EN 61000-3-3 FCC Part 15 Class A, ICES-003

Model Name

Monitored PDU

Model Number

ATP-M-2011B-08-N1

20Amp 115V

Meter True RMS Current Meter,

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols TCPIP, SNMP, DHCP, UDP

Alarm Thresholds User - Defined Alarm Thresholds for Warning and Overload

Event Alert Email, Trap, Audible Alarm

General	
Output	(8) NEMA 5 -15/20R
Input	(1) IEC320 C20 Inlet; Enclosed IEC320 C19 to NEMA 5 -20P Power Cord 3 Meters long
Protection	(1) 20 AMP Circuit Breaker
Communication	
DHCP Indication	(1) Green LED
Network	(1) RJ45 for Ethernet
Current Meter	3 Digits Meter Range: 0A ~ 20 A Resolution: 0.1A Precision: +/ -2%+/ -0.1AMP
Operation	
Nominal Voltage	115V
Voltage	100V~127V full range
Frequency	50/60HZ full range
Max. Output Current	20 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	90 x 432 x 44 mm
Weight	2.5 kg
Regulatory Approvals	CE, EN 55032 Class A, EN 55024,EN 61000-3-2,EN 61000-3-3 FCC Part 15 Class A, ICES-003

Copyright© 2019 Atlantic Power Energy - All rights reserved

Model Name

Monitored PDU

Model Number

ATP-M-3020P-16-N2

30Amp 208V

Meter True RMS Current Meter,

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols TCPIP, SNMP, DHCP, UDP

Alarm Thresholds User-Defined Alarm Thresholds for Warning and Overload

Event Alert Email, Trap, Audible Alarm

Temp./Humidity Option Accessory

General	
Output	(14) IEC 320 C13 (2) IEC 320 C19
Input	(1) L6 -30P attached power cord, 3 meters long
Protection	(2) 16 AMP Circuit Breaker
Communication	
DHCP Indication	(1) Green LED
Circuit Status	(2) Red LED
Network	(1) RJ45 for Ethernet
Temp./Humidity	(1) RJ11 for ENV probe connection
PDU ID	1 Digits Seven Segment for PDU Identification
Current Meter	3 Digits Seven Segments for True RMS Meter Range: 0A ~ 20 A Resolution: 0.1A Precision: +/ -2%+/ -0.1AMP
Operation	
Nominal Voltage	208 V
Voltage	200V~ 240V full range
Frequency	50/60HZ full range
Max. Output Current	30 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	56 x 1245 x 44 mm
Weight	3.8 kg
Regulatory Approvals	CE, EN 55032 Class A, EN 55024,EN 61000-3-2,EN 61000-3-3 FCC Part 15 Class A, ICES-003

Atlantic Power Energy
Copyright© 2019 Atlantic Power Energy - All rights reserved

More info:
www.atlanticpowerenergy.com

Model Name

Monitored PDU

ATLANTIC POWER energy

Model Number

ATP-M-3011M-16-N2

30Amp 115V

General	
Output	(16) NEMA5 -20/15R
Input	(1) NEMA L5 -30P attached power cord, 3 meters long
Protection	(2) 15 AMP Circuit Breaker
Communication	
DHCP Indication	(1) Green LED
Circuit Status	(2) Red LED
Network	(1) RJ45 for Ethernet
Temp./Humidity	(1) RJ11 for ENV probe connection
PDU ID	1 Digits Seven Segment for PDU Identification
Current Meter	3 Digits Seven Segments for True RMS Meter Range: 0A ~ 20 A Resolution: 0.1A Precision: +/ -2%+/ -0.1AMP
Operation	
Nominal Voltage	115V
Voltage	100V~127V full range
Frequency	50/60HZ full range
Max. Output Current	30 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	56 x 1245 x 44 mm
Weight	3.8 kg
Regulatory Approvals	CE, EN 55032 Class A, EN 55024,EN 61000 -3-2,EN 61000 -3-3 FCC Part 15 Class A, ICES -003

Meter True RMS Current Meter,

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols TCPIP, SNMP, DHCP, UDP

Alarm Thresholds User-Defined Alarm Thresholds for Warning and Overload

Event Alert Email, Trap, Audible Alarm

Temp./Humidity Option Accessory

Model Name

Monitored PDU

Model Number

ATP-M-1023J-01-N1

10Amp 230V

Meter True RMS Current Meter,

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols TCPIP, SNMP, DHCP, UDP

Alarm Thresholds User-Defined Alarm Thresholds for Warning and Overload

Event Alert Email, Trap, Audible Alarm

Temp./Humidity Option Accessory

General	
Output	(1) IEC 320 C13
Input	(1) IEC320 C20 Inlet; Enclosed IEC320 C19 to C14 Power Cord 3 Meters long
Communication	
DHCP Indication	(1) Green LED
Network	(1) RJ45 for Ethernet
Circuit Status	(1) Red LED
Temp./Humidity	(1) RJ11 for ENV probe connection
Current Meter	3 Digits Meter Range: 0A ~ 20 A Resolution: 0.1A Precision: +/ -2%+/ -0.1AMP
Operation	
Nominal Voltage	230V
Voltage	200V~ 240V full range
Frequency	50/60HZ full range
Max. Output Current	10 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	56 x 380 x 44 mm
Weight	1.5 kg
Regulatory Approvals	CE, EN 55032 Class A, EN 55024,EN 61000-3-2,EN 61000-3-3 FCC Part 15 Class A, ICES-003

Model Name

Monitored PDU

Model Number

ATP-M-1023J-08-N1

10Amp 230V

Meter True RMS Current Meter,

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols TCPIP, SNMP, DHCP, UDP

Alarm Thresholds User-Defined Alarm Thresholds for Warning and Overload

Event Alert Email, Trap, Audible Alarm

General	
Output	(8) IEC 320 C13
Input	(1) IEC320 C20 Inlet; Enclosed IEC320 C19 to C14 Power Cord 3 Meters long
Protection	(1) 10 AMP Circuit Breaker
Communication	
DHCP Indication	(1) Green LED
Network	(1) RJ45 for Ethernet
Current Meter	3 Digits Meter Range: 0A ~ 20 A Resolution: 0.1A Precision: +/ -2%+/ -0.1AMP
Operation	
Nominal Voltage	230V
Voltage	200V~ 240V full range
Frequency	50/60HZ full range
Max. Output Current	10 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	90 x 432 x 44 mm
Weight	2 kg
Regulatory Approvals	CE, EN 55032 Class A, EN 55024,EN 61000-3-2,EN 61000-3-3 FCC Part 15 Class A, ICES-003

Atlantic Power Energy
Copyright© 2019 Atlantic Power Energy - All rights reserved

More info:
www.atlanticpowerenergy.com

Model Name

Monitored PDU

Model Number

ATP-M-1623K-01-N1

16Amp 230V

General	
Output	(1) IEC 320 C19
Input	(1) IEC320 C20 Inlet; Enclosed IEC320 C19 to C20 Power Cord 3 Meters long
Communication	
DHCP Indication	(1) Green LED
Network	(1) RJ45 for Ethernet
Circuit Status	(1) Red LED
Temp./Humidity	(1) RJ11 for ENV probe connection
Current Meter	3 Digits Meter Range: 0A ~ 20 A Resolution: 0.1A Precision: +/ -2%+/ -0.1AMP
Operation	
Nominal Voltage	230V
Voltage	200V~ 240V full range
Frequency	50/60HZ full range
Max. Output Current	16 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	56 x 380 x 44 mm
Weight	1.5 kg
Regulatory Approvals	CE, EN 55032 Class A, EN 55024,EN 61000-3-2,EN 61000-3-3 FCC Part 15 Class A, ICES-003

Meter True RMS Current Meter,

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols TCPIP, SNMP, DHCP, UDP

Alarm Thresholds User-Defined Alarm Thresholds for Warning and Overload

Event Alert Email, Trap, Audible Alarm

Temp./Humidity Option Accessory

Model Name

Monitored PDU

Model Number

ATP-M-1623K-08-N1

16Amp 230V

Meter True RMS Current Meter,

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols TCPIP, SNMP, DHCP, UDP

Alarm Thresholds User-Defined Alarm Thresholds for Warning and Overload

Event Alert Email, Trap, Audible Alarm

General	
Output	(8) IEC 320 C13
Input	(1) IEC320 C20 Inlet; Enclosed IEC320 C19 to C20 Power Cord 3 Meters long
Protection	(1) 16 AMP Circuit Breaker
Communication	
DHCP Indication	(1) Green LED
Network	(1) RJ45 for Ethernet
Current Meter	3 Digits Meter Range: 0A ~ 20 A Resolution: 0.1A Precision: +/ -2%+/ -0.1AMP
Operation	
Nominal Voltage	230V
Voltage	200V~ 240V full range
Frequency	50/60HZ full range
Max. Output Current	16 Amp
Temperature	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	90 x 432 x 44 mm
Weight	2 kg
Regulatory Approvals	CE, EN 55032 Class A, EN 55024,EN 61000-3-2,EN 61000-3-3 FCC Part 15 Class A, ICES-003

Atlantic Power Energy

Copyright© 2019 Atlantic Power Energy - All rights reserved

More info:
www.atlanticpowerenergy.com

Monitored PDU

Monitored PDU is built-in network interface and allows a manager to monitor PDU power consumption from a remote interface.

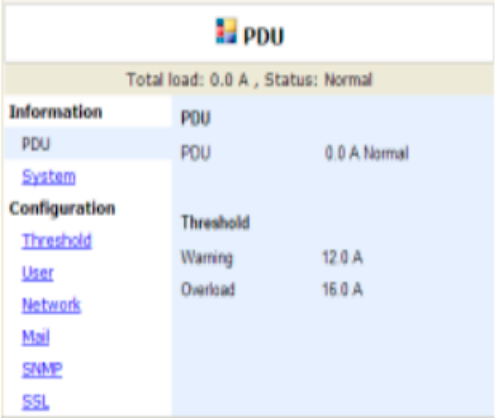

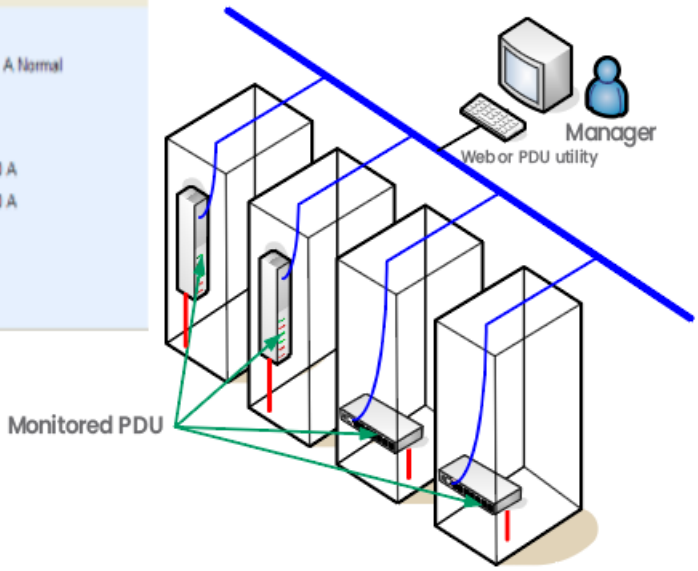

In-line Current Meter

ATP-M-3223C-01-N1

ATP-M-1623K-08-N1

ATP-M-3223C-16-N2