

UPS Interactiva ATP AUR-III-HV (650VA-2200VA)



Key Features

- » Build-in voltage regulator with double boost / single buck for reliable power quality.
- » Super fast charger shortens the charging time to 2~4 hours.
- » Tiny-Load sensing technology prevents the battery from deep discharge problem while connecting to tiny loads.
- » Auto restart that UPS can automatically start without manual setting up when AC input power is back on line.
- » Overload protection that alert or shutdown action will be performed for preventing further damage to UPS during overload conditions.

-  Modified sinewavw output
-  Built-in batteries
-  Super Fast Charging
-  Tiny Load Sensing

Rear panel



650/850/1050VA




1200VA



1500/2200VA

Typical Applications

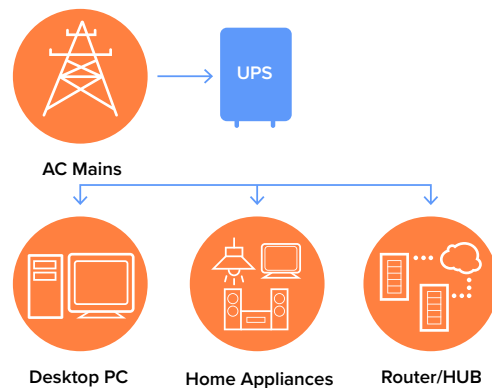

Specifications

MODEL		Aurora III 650	Aurora III 850	Aurora III 1050	Aurora III 1200	Aurora III 1500	Aurora III 2200
CAPACITY		650VA / 390W	850VA / 480W	1050VA / 600W	1200VA / 600W	1500VA / 900W	2200VA / 1200W
INPUT	Input Voltage Range	140~300VAC			140~300VAC		
	Input connections	fixed power cord with plug UK / NEMA / Schucko, IEC inlet			fixed power cord with plug UK / NEMA / Schucko, IEC inlet		
	Power cord length	1.2M			1.2M		
OUTPUT	Output Power Factor	0.6	0.56	0.57	0.5	0.6	0.5
	Nominal Output Voltage	230VAC			230VAC		
	Voltage Range (Line Mode)	196-257V			196-257V		
	Voltage Range (Battery Mode)	230V+/-10%			230V+/-10%		
	Frequency Range (Battery Mode)	50± 1 Hz			50± 1 Hz		
	Output Waveform	Modified sine wave			Modified sine wave		
	Topology	Line interactive			Line interactive		
	Cold Start	Available			Available		
BATTERY	Battery Type	12V/7Ah	12V/9Ah	12V/9Ah	12V/7Ah	12V/7Ah	12V/9Ah
	Number of Internal Battery	1	1	1	2	2	2
	Backup Time (@ 100W load)	16 mins	20 mins	22 mins	40 mins	40 mins	50 mins
	Recharge Time (to 90%)	2~4 Hours			2~4 Hours		
TRANSFER TIME	Battery Mode <---> Line Mode	3-8 ms typical					
DISPLAY		LED*1	LED*1	LED*1	LED*3	LED*3	LED*3
AUDIBLE ALARM		Yes			Yes		
PHYSICAL ENVIRONMENT/ CERTIFICATE	Dimension (WxHxD)	100*143*278 mm			139*195*364		
	Net Weight	4.2 kg	4.9 kg	5.2 kg	7.9 kg	8.8 kg	9.1 kg
	Caron	Option: Color Box/brown carton			Option: Color Box/brown carton		
	Pallet	option			option		
	Operating Temperature	0~40°C			0~40°C		
	Noise Level	<40dB			<40dB	<45dB	<45dB
	Certificate	No			No		
INTERFACE	USB	Option			Option		
	TVSS protection	Option (RJ11)			Option (RJ45)		
ACCESSORY	Manual	Option			Option		
	USB cable	Option			Option		
	CD for COM S/W	Option			Option		
	Warranty card	Option			Option		

