

VRLA AGM battery

ATP HR12-28W-FR




Atlantic Power High Rate series batteries are specially designed for applications that require high power output. With their high-power density and low internal resistance, the HR series are the right choice for your most demanding applications.


Specifications

Nominal Voltage	12V	
Number of cell	6 cells	
Rated capacity(15min.rat)	28 Watts/cell	
Dimensions	Length	151±1.5mm(5.94inch)
	Width	65±1mm(2.56inch)
	Height	94±1mm(3.70inch)
	Total Height	100±1mm(3.90inch)
Approx. Weight	2.3kg(5.06lbs)±4%	

Outer dimensions (mm)



Terminal Type (mm)

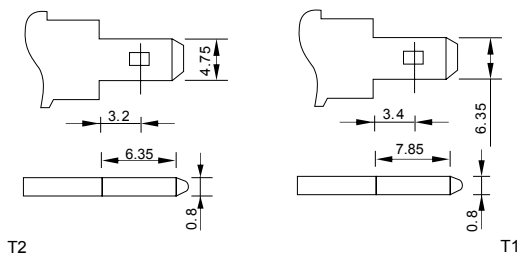

Characteristics

Capacity(20H R,25°C)	7.5Ah	
Capacity(15min.rate,25°C)	28 Watts/cell	
Terminal type	T2/T1	
Internal resistance (Fully charged,25°C)	Approx.14m Ω	
Capacity affected by temperature (10HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 months	Remaining Capacity:91%
	6 months	Remaining Capacity:82%
	12 months	Remaining Capacity:65%
Nominal operating temperature	25°C ±3°C(77°F ±5°F)	
Operating temperature range	Discharge	-15°C-50°C(5°F-122°F)
	Charge	-10°C-50°C(14°F-122°F)
	Storage	-20°C-50°C(-4°F-122°F)
Float charging voltage(25°C)	13.50 to 13.80V Temperature compensation: -18mV/ °C	
Cyclic charging voltage(25°C)	14.50 to 15.00V Temperature compensation: -30mV/°C	
Maximum charging current	2.7A	
Maximum discharge current	135A(5 sec.)	
Designed floating life(20°C)	5years	

Construction

Component	Positive plate	Negative plate	Container	Cover	Separator	Electrolyte	Safety valve	Terminal
Raw material	Lead dioxide	Lead	ABS	ABS	AGM	Sulfuric acid	Rubber	Copper

Constant Current Discharge Characteristics Unit:A(25°C,77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h
1.60V/cell	31.3	19.3	15.1	12.0	8.12	6.01	4.91	2.81	2.00	1.61	1.38
1.67V/cell	29.9	18.4	14.6	11.5	7.85	5.81	4.80	2.79	1.98	1.58	1.37
1.70V/cell	29.1	17.9	14.2	11.2	7.71	5.71	4.72	2.77	1.97	1.59	1.36
1.75V/cell	27.9	17.2	13.8	10.9	7.52	5.57	4.62	2.73	1.96	1.57	1.35
1.80V/cell	26.3	16.1	13.0	10.3	7.25	5.36	4.48	2.66	1.91	1.53	1.32

Constant Power Discharge Characteristics Unit:W(25°C,77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h
1.60V/cell	60.1	37.4	30.0	23.7	16.1	11.9	9.78	5.59	4.01	3.23	2.78
1.67V/cell	57.38	35.7	28.9	22.8	15.6	11.5	9.52	5.54	3.98	3.20	2.75
1.70V/cell	55.8	34.8	28.1	22.3	15.3	14.4	9.35	5.51	3.96	3.19	2.74
1.75V/cell	53.5	33.2	27.2	21.5	14.9	11.0	9.18	5.43	3.94	3.17	2.72
1.80V/cell	50.5	31.5	25.8	20.4	14.4	10.6	8.84	5.29	3.82	3.07	2.64

Note: The above characteristics data can be obtained within three charge or discharge cycles.


Discharge characteristics(25°C)

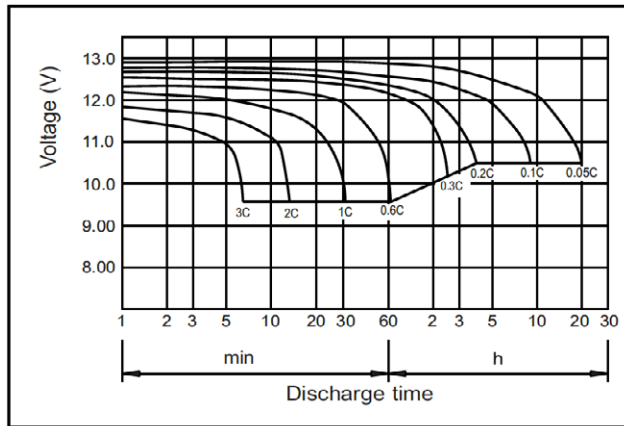


Charging characteristics

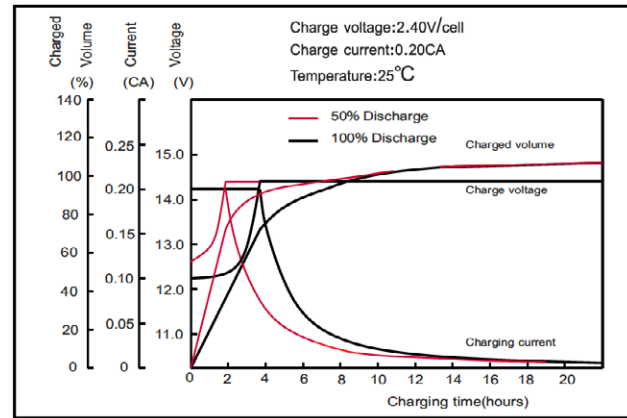


Effect of Temperature on Capacity

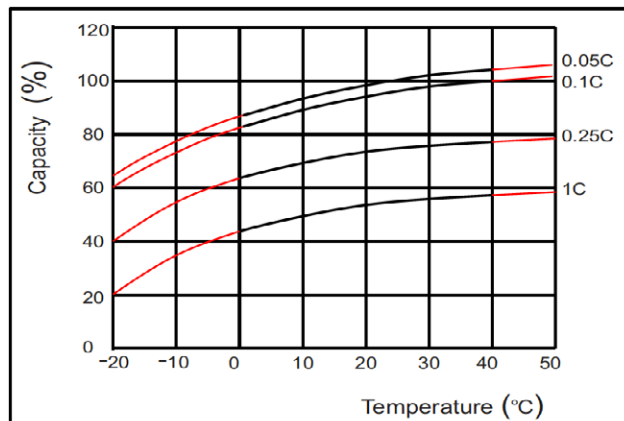


Self-discharge characteristics

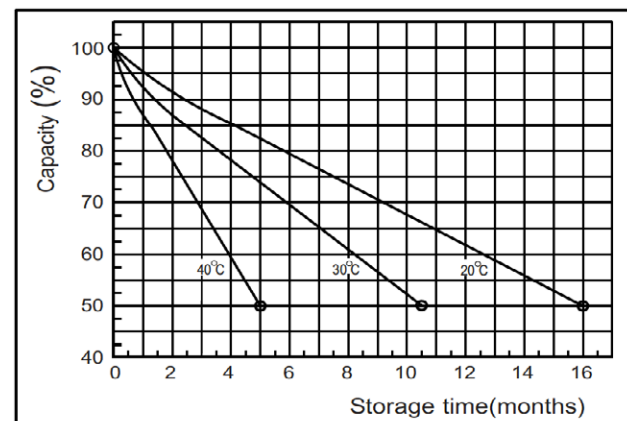


Temperature effects on float life

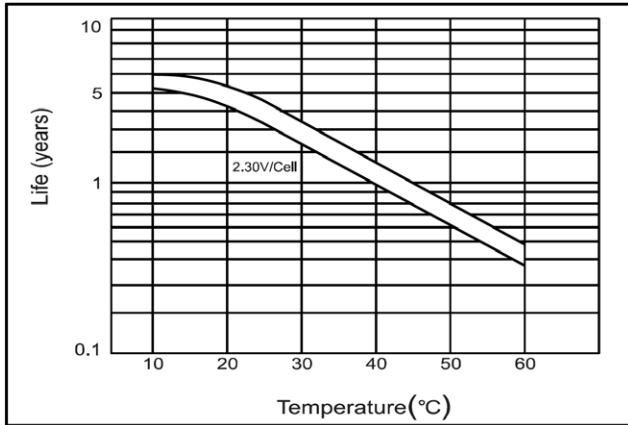

Cycle service life in relation to depth of discharge

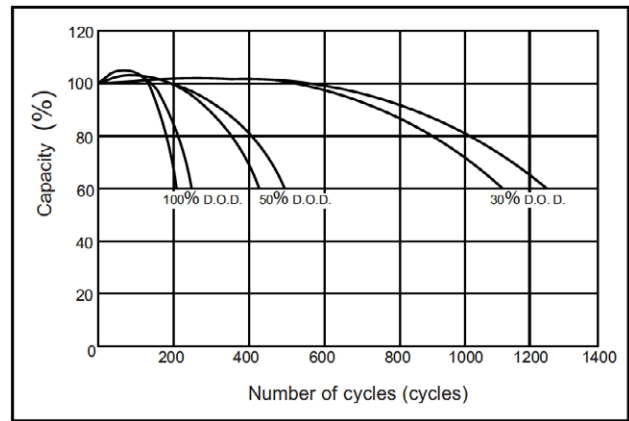

The relationship for OCV and Capacity (25't)

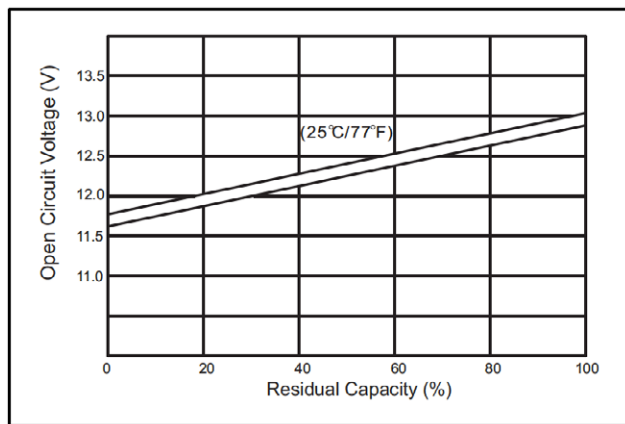

The relationship for Charging voltage and Temperature

